



INTERNATIONAL ARRIVALS 4:24 PM

Origin	Flight	Scheduled	Estimated	Remarks
DELTA	Santiago DL167	3:23 PM	3:38 PM	Arrived
DELTA	Accra DL9935	11:30 AM	7:40 PM	Delayed
DELTA	Amsterdam KL641	3:45 PM	3:15 PM	Arrived
DELTA	Amsterdam KL643	7:23 PM	8:54 PM	Delayed
DELTA	Athens DL203	5:00 PM	4:45 PM	New Time
DELTA	Athens DL230	5:34 PM	5:23 PM	New Time
DELTA	Cancun DL217	3:35 PM	2:54 PM	Arrived
DELTA	Dakar EK205	6:55 PM	6:45 PM	New Time
DELTA	Dubai DL299	6:40 PM	6:45 PM	New Time
DELTA	Lagos V8045	3:09 PM	3:14 PM	Arrived
DELTA	London LHR DL604	7:40 PM	6:35 PM	New Time
DELTA	London LHR V8009	7:30 PM	7:34 PM	New Time
DELTA	London LHR AM102	2:55 PM	2:51 PM	Arrived
DELTA	Mexico City DL185	3:25 PM	3:06 PM	Arrived
DELTA	Milan DL1957	5:55 PM	5:39 PM	New Time
DELTA	Managua Bay DL287	5:15 PM	5:12 PM	New Time
DELTA	Paris CDG DL1833	8:10 PM	8:42 PM	New Time
DELTA	Punta Cana DL979	7:00 PM	7:00 PM	New Time
DELTA	Quito DL231	4:00 PM	3:43 PM	Arrived
DELTA	Rome DL1822	5:30 PM	5:27 PM	New Time
DELTA	Santiago SQ024	5:25 PM	5:29 PM	New Time
DELTA	Singapore DL1829	6:10 PM	6:13 PM	New Time
DELTA	St. Domingo CI017	7:20 PM	6:30 PM	New Time
DELTA	Taipei			

TAA JFK INTERNATIONAL AIR TERMINAL



WELCOME TO THE BIG APPLE

NIXEL SERIES™ FLEX

Indoor displays engineered for the perfect curve and mount-free fit.

- Flat or True Curve™
- 0.9–9.5mm Pixel Pitch
- Indoor
- Customizable
- 100K Lifetime
- TAA Compliant

At Nanolumens, we've set our sights—and our standards—high when it comes to LED and service. We leverage the best technology to meet everyday needs and enable digital transformation. Our promise to you is an unsurpassed first and lasting experience.

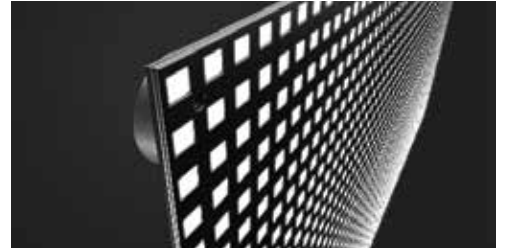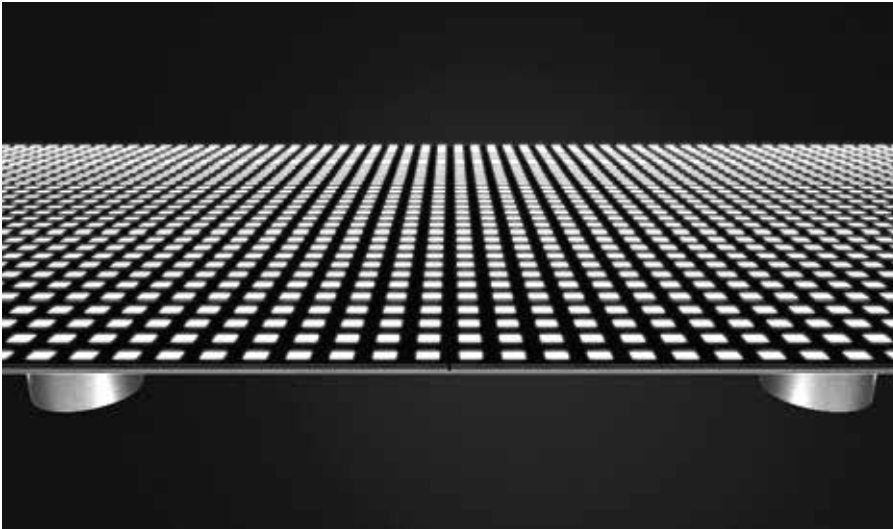

Why Nanolumens

At Nanolumens, we've set our sights — and our standards — high when it comes to LED and service. We leverage the best of technology to meet everyday needs and enable digital transformation. Our promise to you is an unsurpassed first and lasting experience.

NIXEL™ to Pixel Warranty

Your display is engineered to pass the ultimate test: time. We use high-performing materials like gold wiring to ensure your display is a worthwhile investment. Our Warranty coverage starts pixel one ensuring your display is covered 100% from our Atlanta headquarters.

Benefits

True Curve Technology

Seamless and able to produce complex curves and unique shaped designs that allow for limitless design freedom.

Standard or Completely Customizable

Seamless and able to produce complex, unique shaped displays to fit tight or difficult spaces.

Uncompromising Quality Components

Maximize your ROI with your investment in superior components like gold wiring.

Patented Frame and Skin Topology

Each display is built-to-suit any application desired. Custom right down to the installation.

SPECIFICATIONS: NIXEL SERIES™ (FLEX)

Pixel Pitch	0.93mm	1.25mm	1.56mm	1.87mm	2.5mm	3.8mm	4.7mm	5.4mm	6.3mm	9.5mm
Module Size (W X H)¹	52 Max 18 Avg	67.8 Max 20.4 Avg	67.9 Max 20.4 Avg	75.0 Max 25 Avg	56.41 Max 16.92 Avg	304.8 mm x 152.4 12.0 x 6.0 in				
Module array per "Full HD"	6x6	8x8	10x10	12x12	20x18	24x27	30x34 ²	34x38 ²	40x45	60x68 ²
Module Resolution	320x180	240x135	192x108	160x90	96x60	80x40	64x32	56x28	48x24	32x16
Module Depth³	104.9 mm / 4.13 in									
Weight/ft²²	52Max 18 Avg	67.8 Max 20.4 Avg	69.7 Max 20.4 Avg	69.7 Max 17.1 Avg	69.70 Max 20.91 Avg	44.05 Max 13.22 Avg	48.05 Max 13.22 Avg	42.01 Max 12.60 Avg	41.82 Max 12.60 Avg	41.82 Max 12.55 Avg
Weight/ft²	4.65 Kg/m ² 4.65 lb/ft ²	5.1 lbs / 2.31 kg				5.5 lbs / 2.49 kg				
Max Brightness (standard)⁴	1000nits*	770nits	750nits	800nits		980nits	1190nits	1800nits		
Viewing Angle Max⁵	178° horizontal / 178° vertical									
Viewing Angle L50⁵	170° H 165° V	170° H 170° V	160° H 160° V			160° H 140° V	160° H 160° V	170° H 160° V		
Minimum Diameter⁶	1829 mm / 72 in				1219 mm / 48 in			1067 mm / 42 in	915 mm / 36 in	
Serviceability	Front									
Indoor/Outdoor⁷	Indoor									
Input Voltage (VAC)	110 / 120 / 208 / 220 / 240 VAC - Single Phase									
Output Bit Depth⁸	8-bit Standard (16.7 Million) / Up to 10-bit (>1 Billion)									
Lifetime	>100,000 hours									
AWARE™	Enabled Upon Request									
Operating Temperature	Operating: 0 to 50C, Non Condensing Humidity									

1 Nixel™ footprint, bespoke sheet metal frame adds 1/2" to overall system height and width

2 This product does not array to exactly 1920x1080

3 Nixel Series™ standard system depth is overall depth of frame+skin topology including finish decor/trim

4 Higher brightnesses are possible through additional customization

5 L50 is objective measured angle at which brightness decreases to 50% of max brightness

6 Minimum Diameter is based on standard framework and components – tighter radii are possible through additional customization

7 Humidity Resistant (HR) version of Nixel Series™ is available for use in non-air-conditioned, covered outdoor spaces and enclosures – see Nixel Series™ HR specification sheet

8 Nixel Series™ LED displays process at up to 14 bits per channel internally. Final output bit depth is limited by content source capabilities.

*Ceiling mount options may require reduction in brightness

Designed and Assembled in the USA

